
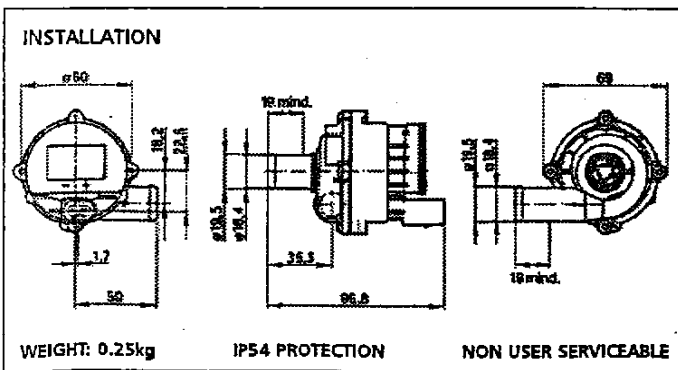


GB COMMERCIAL CIRCULATION PUMP

- 12.5 litres/min @ 0.12 Bar
- Magnetic Drive - sealed pump chamber
- Ignition protected (ISO8846 MARINE)
- Meets EMC requirements
- Connections for 19mm (3/4") ID Hose
- Continuously rated
- Pumps water at 100°C
- Handles aggressive liquids
- Long life brushless DC motor

GB INSTALLATION AND SAFETY

- Fit pump in a dry position, as close as possible to the liquid being pumped. The pump must be installed below the lowest liquid level.
- Use 19mm (3/4") spiral reinforced hose (with a smooth internal bore) or semi-rigid pipework systems.
- Pipe runs should be as straight and as short as possible, avoiding rising and dipping over obstructions.
- *Warning!* Do not use any Jabsco pump for petrol, petroleum products, or fluids with a flashpoint below 37°C (98°F).
- Refer to wiring table for fuse and wire size.

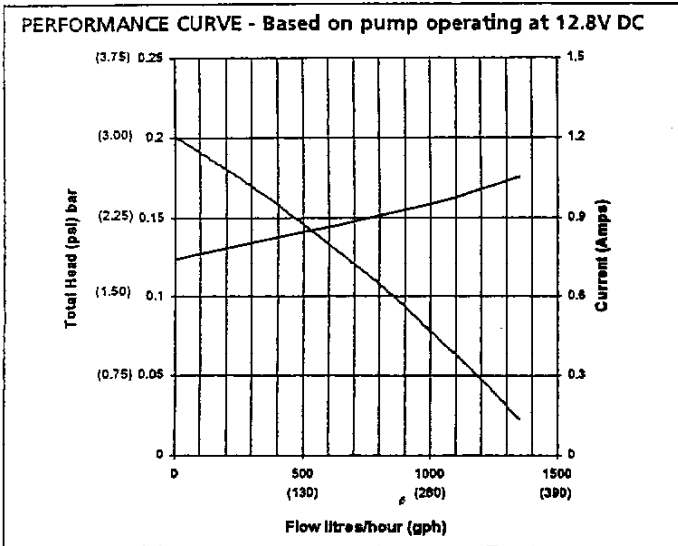

Model No.	Voltage	Fuse Size	Current Draw	Cable Length*	Minimum Wire Size	
59510-0012	12 V DC	2A	1.2A	0 - 8 m (0 - 27 ft) 8 - 15 m (27 - 50 ft)	2.5 mm ² 4.0 mm ²	AWG 12 AWG 10

* Cable length is the total distance from the battery to the pump and back to the battery.

