


**GB COMMERCIAL CIRCULATION PUMP**


- Up to 21 litres/min (5.5 gpm) @ 0.10 bar (1.45 psi)
- Variable flow - 5 speed control
- Ignition protected (ISO8846 MARINE)
- Meets EMC requirements
- Connections for 3/4" BSP
- Continuously rated
- Pumps water at 80°C (176°F)
- Handles aggressive liquids
- Long life brushless DC motor

**GB INSTALLATION AND SAFETY**

- Fit pump in a dry position, as close as possible to the liquid being pumped. The pump must be installed below the lowest liquid level.
- Use 19mm (3/4") spiral reinforced hose (with a smooth internal bore) or semi-rigid pipework systems.
- Pipe runs should be as straight and as short as possible, avoiding rising and dipping over obstructions.
- *Warning!* Do not use any Jabsco pump for petrol, petroleum products, or fluids with a flashpoint below 37°C (98°F).
- Refer to wiring table for fuse and wire size.

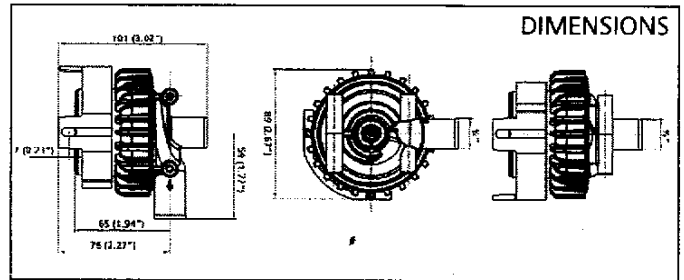

**PERFORMANCE CURVES**

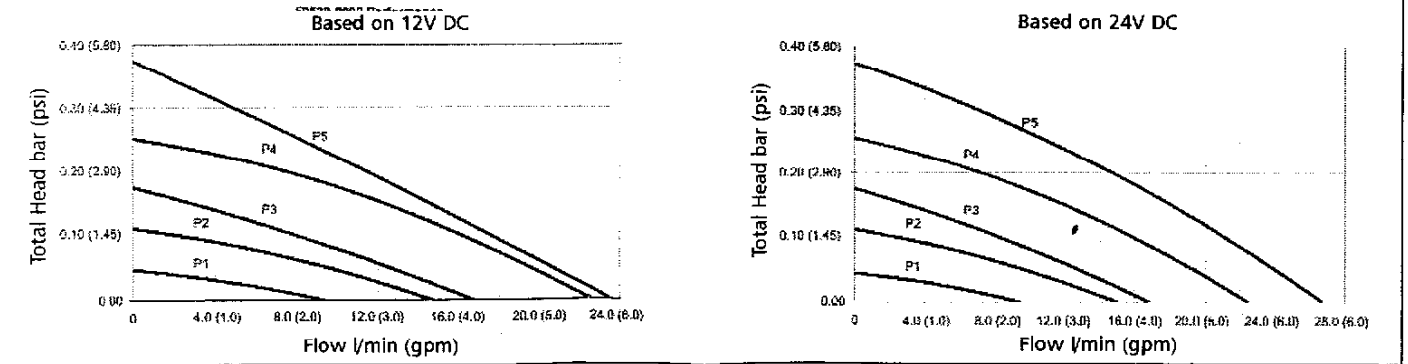

Model No.	Voltage	Fuse Size	Max. Current Draw	Cable Length*	Minimum Wire Size	
59530-0000	8-24 V DC	2.5A	1.8A	0 - 8 m (0 - 27 ft) 8 - 15 m (27 - 50 ft)	2.5 mm <sup>2</sup> 4.0 mm <sup>2</sup>	AWG 12 AWG 10

\* Cable length is the total distance from the battery to the pump and back to the battery.

**WEIGHT: 0.32kg (0.70 lb)**

**IP34 PROTECTION**

**NON USER SERVICEABLE**



77-01 565